



Insulation spacer for universal power rail

UPR-I


- Electrical insulation of segmented Power Rail inserts
- Suitable for Power Rail UPR-**-*
- Suitable for profile rail K-DUCT
- Packaging unit: 10 pieces

Insulation spacer for universal power rail UPR-**-*

Function

The insulation spacer mounts onto a 35 mm DIN rail. It is used for electrical insulation of segmented Power Rail inserts.

Assembly

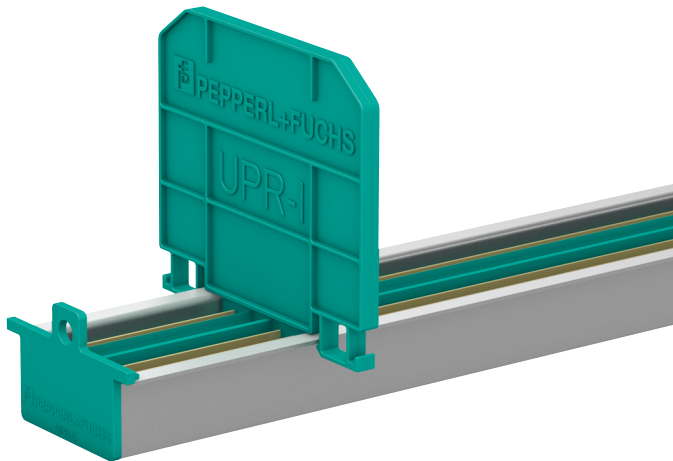

Release date: 2023-05-22 Date of issue: 2023-05-22 Filename: 198402_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com


USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Dimensions

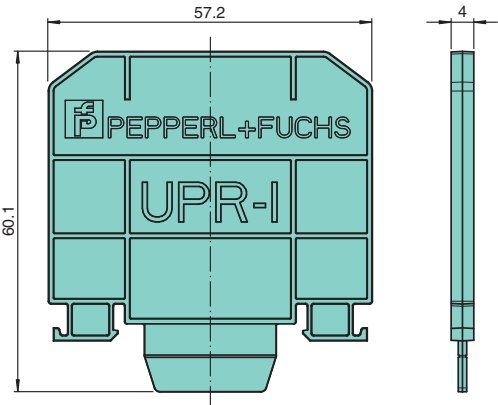

Technical Data

Ambient conditions		
Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)	
Mechanical specifications		
Material	Polycarbonate	
Mass		approx. 20 g
Dimensions	4 x 57 x 60 mm (0.16 x 2.24 x 2.36 inch)	
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
General information		
Packing unit		10 pieces

Accessories

	UPR-MR	35 mm DIN mounting rail, length: 2 m (packaging unit: 2 pieces)
	UPR-E	End cap for universal power rail UPR-**-*
	UPR-COVER	Cover for 35 mm DIN mounting rail

Release date: 2023-05-22 Date of issue: 2023-05-22 Filename: 198402_eng.pdf